



PREMIUM
BWT bestmax
 best water technology



First-class water optimisation for the catering sector



- Flexible – only one connecting filter head for all filter types
- Capacity sufficient for 5440 l of perfectly mineralised water
- Simple – quick filter change, simple disposable system
- Cost-effective – ideal for compact catering appliances

BWT bestmax PREMIUM with the AromaPLUS formula

- PREMIUM taste in cup and mug
- Well-balanced mineralisation in favour of magnesium

Top technology

With all the benefits of BWT bestmax standard filter cartridges


- Highest efficiency with 5-way filtration
- Including filtration of the bypass water
- Horizontal and vertical installation possible
- Direct, one-off bypass setting on the filter head
- Automatic shut-off valve when changing filter

BWT bestmax PREMIUM

When coffee or tea tastes flat or flavourless, the fault does not necessarily lie with the beans or variety of tea. The water or rather, an imbalance of the minerals in the water, can also be responsible for this.


BWT bestmax PREMIUM and its AromaPLUS formula can change this for you immediately. This groundbreaking innovation for water optimisation from BWT water+more returns the mineral content in the water to an acceptable equilibrium. In particular, the essential mineral magnesium benefits from this. It brings out the full aromas of coffee, tea or cocoa. But BWT bestmax PREMIUM water tastes just as great when served pure. Well cooled, served in a jug, it is the perfect match: free from particles and odor, with a balanced mineral note, it is a great pleasure for gourmets.

BWT bestmax PREMIUM ensures that you reliably remove the carbonate hardness and protect your machine against scale deposits.

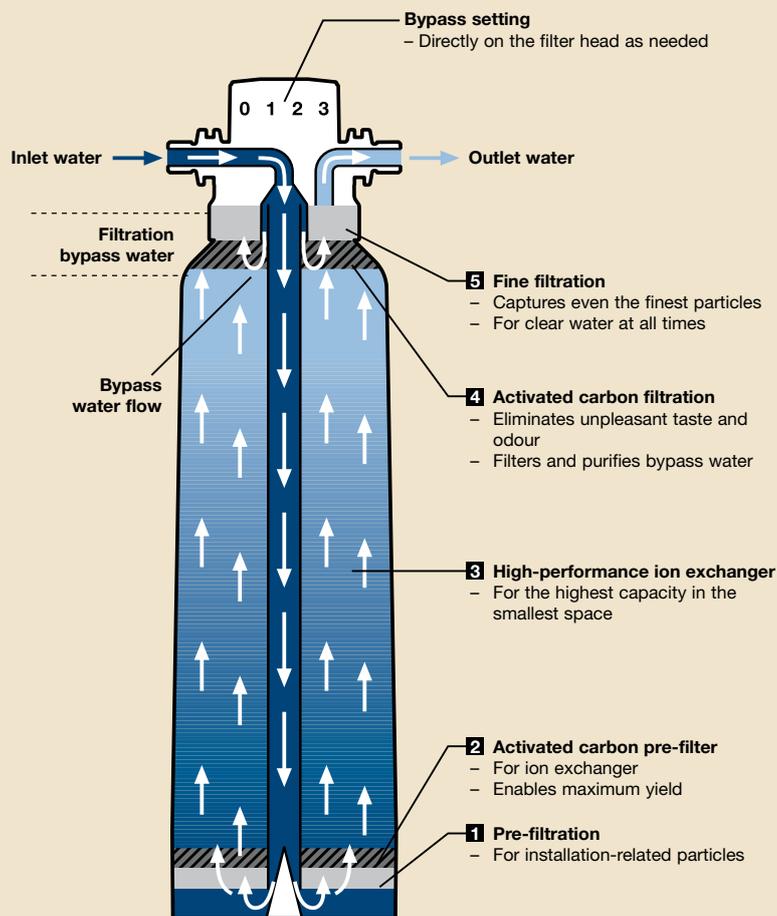

Configuration of a BWT bestmax PREMIUM filter cartridge with 5-way filtration

Technical Data*

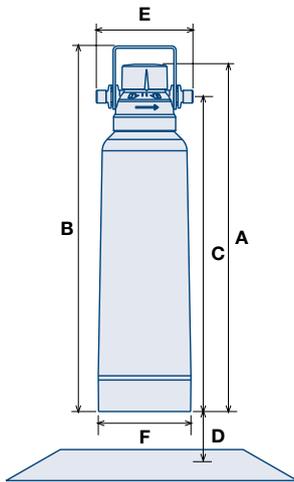

BWT bestmax PREMIUM Type	S	V	M	XL	2XL
Connection thread (in/out)	3/8"	3/8"	3/8"	3/8"	3/8"
Intake pressure, min.–max. in bar	2–8	2–8	2–8	2–8	2–8
Water temperature, min.–max. in °C	4–40	4–40	4–40	4–40	4–40
Ambient temperature, min.–max. in °C	4–60	4–60	4–60	4–60	4–60
Total height without bracket (A) in mm	360	420	475	500	574
Total height with bracket (B) in mm	385	445	500	530	600
Connection height (C) in mm	310	370	425	450	520
Distance from floor (D) in mm	65	65	65	65	65
Installed length (E) in mm	125	125	125	125	125
Ø Filter cartridge (F) in mm	88	115	130	145	185
Weight in kg, approx.	0.9	2.3	2.8	4.0	7.8
Order No. Installation Set	FS22P01A00	FS23P01A00	FS24P01A00	FS28P01A00	FS30P01A00
Order No. Filter Cartridge	FS22P00A00	FS23P00A00	FS24P00A00	FS28P00A00	FS30P00A00

* Subject to change without notice

Settings and Capacities**

Hot and cold drink No Steam	Bypass setting	Filter capacity in litres					
		S	V	M	XL	2XL	
 Total hardness in °dTH	≤7	3	≥1285	≥3085	≥4625	≥7370	≥12000
	8	3	1125	2700	4050	6450	10500
	9	3	1000	2400	3600	5730	9330
	10	3	900	2160	3240	5160	8400
	11	3	740	1780	2670	4255	6925
	12	3	680	1630	2450	3900	6350
	13	3	625	1505	2260	3600	5860
	14	3	580	1400	2100	3340	5440
	15	3	540	1305	1960	3120	5080
	17	3	430	1035	1550	2470	4025
	20	3	365	880	1320	2100	3420
	23	3	315	765	1145	1825	2975
	≥25	3	≤290	≤700	≤1055	≤1680	≤2735

Coffee Machines with Steam	Bypass setting	Filter capacity in litres					
		S	V	M	XL	2XL	
 Total hardness in °dTH	≤7	3	≥1070	≥2570	≥3855	≥6140	≥10000
	8	3	935	2250	3375	5375	8750
	9	3	830	2000	3000	4775	7775
	10	3	750	1800	2700	4300	7000
	11	2	615	1485	2225	3545	5775
	12	2	565	1360	2040	3250	5290
	13	2	520	1255	1885	3000	4885
	14	2	485	1165	1750	2785	4535
	15	2	450	1085	1630	2600	4235
	17	1	355	860	1290	2060	3355
	20	1	305	730	1100	1750	2850
	23	1	265	635	955	1520	2480
	≥25	1	≤240	≤585	≤880	≤1400	≤2280

** The capacities may fluctuate by up to ± 5 % depending on the local water quality and flow speed. The values indicated here are minimum capacities per ° total hardness. For more information, please contact BWT water+more.

Delivery Scope (First Installation Set)

- Filter Cartridge (S, V, M, XL or 2XL)
- Universal filter head with 3/8" external thread (incl. bypass setting and return valve)
- Wall mounting (without fixing material)
- Installation and Operating Instructions

Accessories

- Connecting hose 1500 mm

Order No.:

FS00Y01F00 (3/8" x 3/8")

FS00Y02F00 (3/8" x 3/4")



- BWT bestflush ventilation and flush valve, 3/8" x 3/8"

Order No.: FS00Y51A00

- Hot drinks test kit to determine the carbonate hardness and total hardness of drinking water

Order No.: YS00Y01A00

BWT UK Ltd
water+more
BWT House, The Gateway Centre
Coronation Road
High Wycombe
HP12 3SU
Phone: +44 (0)1494 838100
Fax: +44 (0)1494 838104

BWT water+more Deutschland GmbH
Spiegelgasse 13
D-65183 Wiesbaden
Tel.: +49.611.58019-0
Fax: +49.611.58019-22
info@water-and-more.de

BWT water + more GmbH
Professional Solutions Austria
Walter-Simmer-Str. 4
A-5310 Mondsee
Telefon +43 6232 5011-1164
Telefax +43 6232 27292-1164
kundenservice@bwt.at